


NEWS FOR FARRIERS

New Products Available at FPD Dealers Near You

FIND THE FPD DEALERS CARRYING THESE PRODUCTS AT FARRIERPRODUCTS.COM/LOCATIONS


Bellota 17" Big Raptor+

The Bellota Big Raptor is 33% wider than regular rasps and 3 inches longer than the Raptor+, making it ideal for large hooves.



Liberty 4 Combo Slim

The 4 Combo Slim is the latest addition to the Liberty Combo Slim range. This nail is a great option for 5/16" shoes in smaller sizes (000, 00, 0) where the hoof doesn't need the length of the 5 Combo Slim or a 5 City but requires a head to fit the same crease. The head is only slightly smaller than the 5 Combo Slim and the nail length of 48.5 mm is between a 5 Race and 5 City.




Watch this product in action on FPD's YouTube channel @farrierproducts

JUST A REMINDER

FootPro™ Double Sided Bench Grinder Disc

This disc is excellent for cleaning up welds, safeing edges and finishing heels. The design of this double sided disc makes it ideal for both grinding and surface finishing steel and aluminum.



Diamond Classic Heeled Shoes

The Diamond Classic Heeled shoe is an excellent choice for polo and trail horses. Manufactured by Kerckhaert using the highest quality steel to hold up in harsh terrain, the Classic Heeled shoe offers uncompromising protection and traction where sure footing is a must.



FPD 21 for '21 Facebook Giveaway




THE JULY 2021 FACEBOOK GIVEAWAY WILL BE (1) 250pc BOX OF LIBERTY Cu COMBO SLIM 4 HORSESHOE NAILS FOR 21 WINNERS.



Follow FPD on Facebook @farrierproductdistribution to see what we're offering in the current month and look for posts like this one to register for a chance to win the monthly free give-away. This giveaway is only valid in the U.S. and Canada.




FootPro™ Double Sided Bench Grinder Disc MOUNTING INSTRUCTIONS




1 Left side shaft of Baldor 1/2hp out of the box. Shaft is 5/8" diameter and 3.25" long and will require a spacer approximately 1" long. The discs will only fit on shafts that are 5/8" diameter. If you have shorter shafts you may not require a 1" spacer but will likely need a spacer of some length to secure safely.



2 Out of the box, the baldor has a pin in the shaft to hold a flange in place. This will need to be removed before installation.




3 Using a nail cutter, squeeze with just enough pressure to be able to roll the cutter back and pull the pin out. Do not cut the pin.




4 Pin removed. The pin hole may have a slight burr that needs to be removed.




5 Use a fine metal file or a piece of emery cloth or very fine sandpaper to remove the burr.

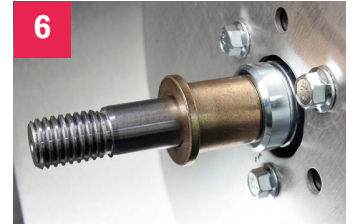

6 Slide a 1" long bushing (spacer) with 5/8" hole on the shaft. The one shown is sold separately by your FPD dealer. If you already have a 1" long bushing that has a 5/8" hole it should work.





7 Slide the flange that came with the Baldor grinder on the shaft.




8 Slide your disc on the shaft. It has a 5/8" arbor so it needs nothing to keep it centered on the 5/8" shaft.



9 Be sure you have the rotation correct. Failure to mount it for the right direction will likely cause damage to the disc and risk of injury. You can mount it on either side of your grinder but it must still be mounted in the right direction.

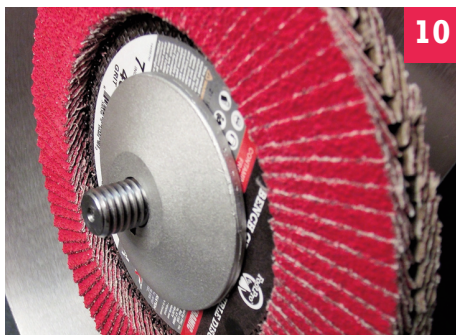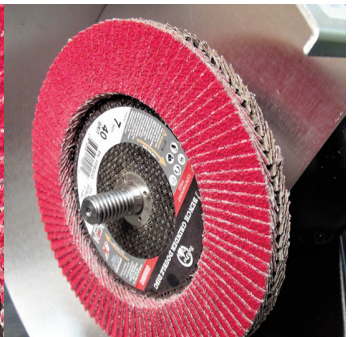

10 Slide second flange onto shaft and against the disc.

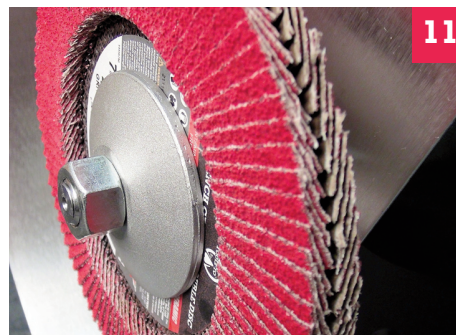

11 Put the shaft nut on and tighten. Remember that the threads on the left side of a grinder are left hand threads.